

Kcal = Watt x 0.860
 BTU = Watt x 3.413

Watt Δt 60° = Watt Δt 50° x 1.298
 Watt Δt 40° = Watt Δt 50° x 0.727
 Watt Δt 30° = Watt Δt 50° x 0.481
 Watt Δt 20° = Watt Δt 50° x 0.270

p max = 6.5 bar

H cm	L cm	I* cm	art*	Lt*	watt Δt 30°	watt Δt 50°	watt Δt 30°	watt Δt 50°
168.0	28.0	30.0	VU168001_	0.7	117	244	82	171

R = CRSM Brushed chrome / Chrome brossé / Gebürstet Chrome / Cromo cepillado
G = GLSM Brushed gold / Doré brossé / Gebürstet Gold / Oro cepillado

Optional



Angled Valve
 Vanne équerre
 Eckausführung Ventil
 Válvula a escuadra

[BIAN] **E12SQB**
 [CROM] **E12SQR**




Angled valve 5 cm pipe centre
 Vanne équerre entraxe 5 cm
 Ventil für 5 cm Mittelanschluss
 Válvula a escuadra 5 cm

[BIAN] **E12SQ5B**
 [CROM] **E12SQ5R**




Thermostatic head
 Tête thermostatique
 Thermostatkopf
 Cabezal termostático

[BIAN] **TTB**
 [CROM] **TTR**



Sleeving kit
 Kit couvre tuyau
 Rosetten
 Kit cubre tubo


[BIAN] **C5B**
 [CROM] **C5R**



$\varnothing \leq 16$ mm
 [BIAN] **CTB**
 [CROM] **CTR**

$16 \text{ mm} < \varnothing < 24$ mm
 [BIAN] **CWB**
 [CROM] **CWR**

art* = item / modèle / Artikel / artículo I* = pipe centres / distance entre depart et retour / Achsabstand / distancia entre las conexiones
 Lt* = water content for each element / volume d'eau pour chaque element / Wassergehalt für Element / contenido de agua por cada elemento
 P* = page / page / Seite / página

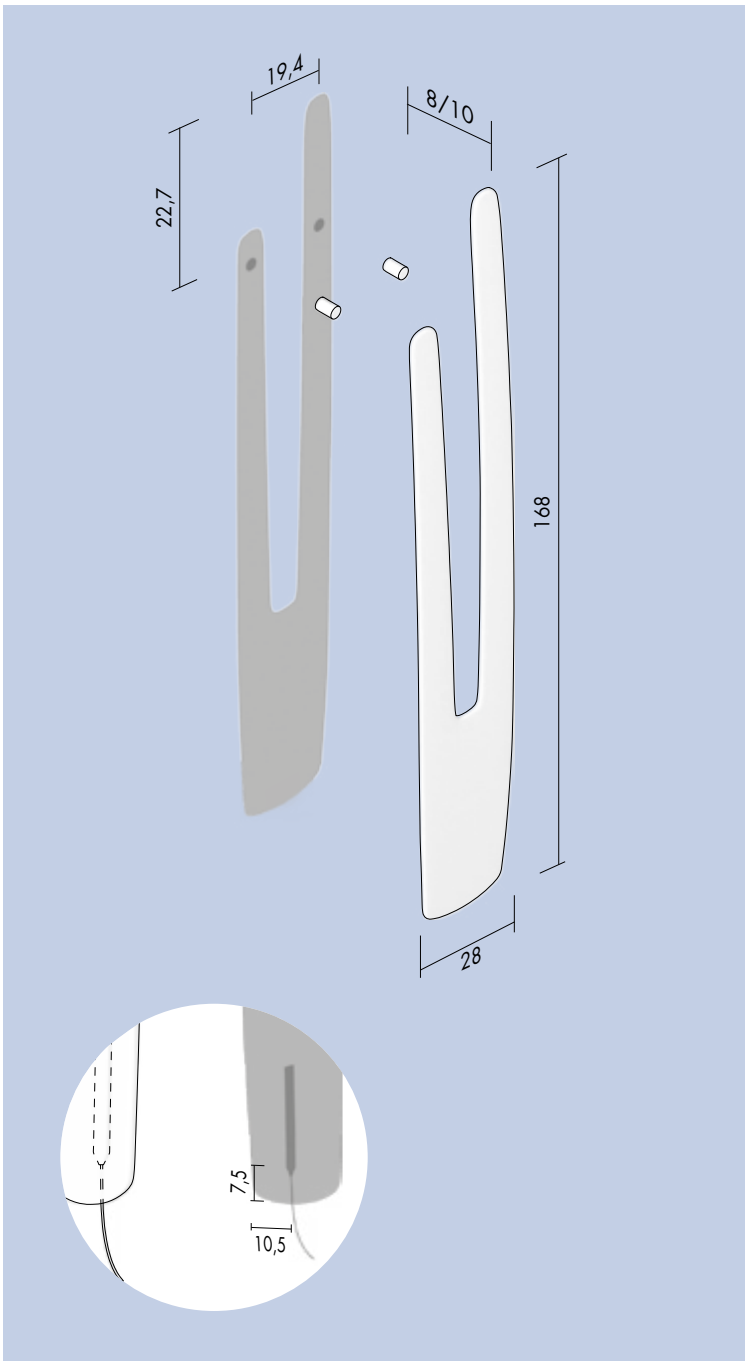

H cm	L cm	art*	watt	watt
168.0	28.0	EC VU168001	300	300

R = CRSM Brushed chrome / Chrome brossé / Gebürstet Chrome / Cromo cepillado
G = GLSM Brushed gold / Doré brossé / Gebürstet Gold / Oro cepillado

Optional



Receiver
Récepteur
Empfänger
Receptor

R10



Digital chronothermostat
Chronothermostat digital
Der digital Chronothermostat
Cronotermostato digital

T10

art* = item / modèle / Artikel / artículo